

**Tara Wastewater Treatment Plant  
13-028**

**2025 Operation and Maintenance  
Annual Report  
March 2026**



**Prepared for:  
Municipality of Arran-Elderslie  
PO Box 70, 1925 Bruce Road 10  
Chesley, ON N0G 1L0**

**Prepared By:  
GSS Engineering Consultants Ltd.  
Suite 230, 945 3<sup>rd</sup> Ave, E.  
Owen Sound, ON N4K 2K8**

## TABLE OF CONTENTS

<b>1.0</b>	<b>INTRODUCTION.....</b>	<b>2</b>
<b>2.0</b>	<b>DESCRIPTION OF FACILITIES.....</b>	<b>3</b>
2.1	Wastewater Treatment Plant .....	3
2.2	Sewage Pumping Station .....	3
<b>3.0</b>	<b>SUMMARY OF WASTEWATER FLOW.....</b>	<b>4</b>
<b>4.0</b>	<b>SUMMARY OF RAW SEWAGE AND EFFLUENT MONITORING.....</b>	<b>5</b>
4.1	De-Sludging of Lagoons .....	5
<b>5.0</b>	<b>SUMMARY OF MAINTENANCE PROGRAM .....</b>	<b>6</b>
<b>6.0</b>	<b>SUMMARY OF COMPLAINTS RECEIVED .....</b>	<b>7</b>
<b>7.0</b>	<b>ASSESSMENT OF SEPTAGE ACCEPTANCE .....</b>	<b>8</b>
<b>8.0</b>	<b>SEWAGE BY-PASS.....</b>	<b>9</b>
<b>9.0</b>	<b>MINISTRY OF THE ENVIRONMENT INSPECTION.....</b>	<b>10</b>
<b>10.0</b>	<b>RECOMMENDATIONS .....</b>	<b>11</b>

## LIST OF TABLES

Table 1	Summary of Wastewater Flows - 2025
Table 1A	Summary of Capacity Utilization - 2025
Table 2	Summary of Average Raw Sewage Monitoring Data – 2025
Table 3	Summary of Effluent Discharge Monitoring - Spring and Fall 2025

## APPENDICES

Appendix A	Certificate of Approval (Sewage)
Appendix B	Flow Meter Calibration

## 1.0 INTRODUCTION

The Tara Sewage Works, in the Municipality of Arran-Elderslie, is comprised of a wastewater treatment plant and a sewage pumping station. The wastewater generated within Tara is collected in the sewer system and is pumped to the wastewater treatment plant by way of a 200 mm diameter forcemain. The wastewater treatment plant comprises of two (2) waste stabilization ponds equipped with season discharge provisions. The plant has influent and effluent structures and a 400 mm diameter outfall sewer to the Sauble River.

The Municipality of Arran-Elderslie has retained the services of GSS Engineering Consultants Ltd. to prepare the Annual Compliance Report for the Tara Sewage Works. The Ministry of Environment Conservation and Parks (MECP) issued an Amended Certificate of Approval # 9456-659N92 dated January 11, 2005 for this facility which revoked and replaced the Certificate of Approval # 1-704-80-006 dated July 2, 1980. Refer to **Appendix A** for Certificate of Approval. The Certificate of Approval stipulated preparation of an annual report addressing the following items:

- Summary of all monitoring data and a comparison to the effluent limits.
- Summary of operational problems encountered, and corrective actions taken.
- Summary of maintenance carried out.
- Summary of complaints received, and steps taken to address the complaints.
- Summary of all by-pass, spill or abnormal discharge events.

During the reporting period of this Annual Report (January 1, 2025 to December 31, 2025), the Tara Sewage works was operated by the Municipality of Arran-Elderslie operators namely:

Scott McLeod, Public Works Manager and Backup Overall Responsible Operator	WWT II WWC II
Ben Overeem	WWT I WWC I
Trevor Sweiger	WWT I WWC I
Chris Legge, Water/Sewers Foreman, Operator in Charge & Backup Overall Responsible Operator	WWT I WWC I
Chase Mcewen	WWT I WWC I
Shane Ryall	WWT I WWC I
Rakesh Sharma, P. Eng., Overall Responsible Operator	WWC IV WWT IV

This report has been prepared based on the information provided by the Municipality of Arran-Elderslie.

## **2.0 DESCRIPTION OF FACILITIES**

### **2.1 Wastewater Treatment Plant**

The wastewater treatment plant comprises of two (2) waste stabilization ponds, each with an area of 3.95 Ha. The depth of the cells is approximately 1.5 m and are provided with influent and effluent structures and associated piping. A 200 mm diameter inlet forcemain carries sewage to the waste stabilization ponds. A 400 mm diameter outfall sewer discharges the treated effluent from the waste stabilization ponds to the Sauble River during the spring and fall discharge periods.

### **2.2 Sewage Pumping Station**

The sewage pumping station is located north of Mill Street and is equipped with two (2) vertical, centrifugal, dry pit, non-clog pumps (one duty and one standby) each capable of pumping 27.4 L/s against a total dynamic head of 21.5 m. The discharge forcemain at the sewage pumping station has a 150 mm magnetic flow meter and an emergency bypass connection. Two (2) positive displacement diaphragm-type chemical metering pumps (one duty and one standby), each capable of pumping 40 L/h of Alum for phosphorous removal, provide alum dosing into the forcemain. An emergency overflow, which permits overflow to the Sauble River, is provided from a manhole located in the inlet sewer. A 50 kW diesel generator is also installed at this facility to provide standby power.

### 3.0 SUMMARY OF WASTEWATER FLOW

A summary of the wastewater flows received at the wastewater treatment plant is provided in **Table 1**. As can be noted from **Table 1**, the average daily flow was 380.6 m<sup>3</sup>/day and the maximum daily flow was 1,656.1 m<sup>3</sup>/day which occurred on March 15, 2025. The total annual flow was 141,221.7 m<sup>3</sup>. The design capacity of the treatment plant is 650 m<sup>3</sup>/day; therefore, the capacity utilization of the plant was 59% of the design capacity.

Enclosed **Table 1A** provides a summary of plant capacity utilization since 2012. The table is self-explanatory.

In April 2025 the flow meter was checked for calibration by Tower Electronics Canada. The calibration check result was “Pass”.

**TABLE 1**  
 Summary of Wastewater Flows - 2025  
 Tara Wastewater Treatment Plant  
 Municipality of Arran-Elderslie

March, 2026

13-028

Month	Total Flow (m <sup>3</sup> )	Average Daily Flow (m <sup>3</sup> /day)	Maximum Daily Flow (m <sup>3</sup> /day)	Day of Maximum Flow Occurrence
January	11,833.0	381.7	570.2	1st
February	10,068.0	335.6	514.2	25th
March	21,881.4	705.9	1656.1	15th
April	16,121.0	520.0	1568.3	2nd
May	11,611.0	375.0	454	1st
June	9,983.3	322.0	396.3	30th
July	10,091.7	325.5	386	6th
August	9,709.0	313.2	405.5	20th
September	8,791.1	283.6	356	1st
October	9,454.6	305.0	376	21st
November	9,617.1	310.2	420.9	23rd
December	12,060.5	389.1	660.2	28th
<b>Total</b>	<b>141,221.7</b>			
<b>Average</b>		<b>380.6</b>		
<b>Maximum</b>			<b>1,656.1</b>	

**TABLE 1A**

Summary of Capacity Utilization - 2025

Tara Wastewater Treatment Plant

Municipality of Arran-Elderslie

March, 2026

13-028

Year	Average Day Flow (m <sup>3</sup> /day)	Capacity Utilization	Maximum Day Flow (m <sup>3</sup> /day)
2025	380.6	59.0%	1,656.1
2024	357.6	55.0%	883.7
2023	345.9	53.2%	1,122.0
2022	350.5	53.9%	937.9
2021	375.5	57.8%	1178.2
2020	354.7	54.6%	1,001.2
2019	382.3	58.8%	1,218.4
2018	404.2	62.2%	1,725.9
2017	408.8	62.9%	1,871.9
2016	357.2	55.0%	1,623.5
2015	344.8	53.0%	781.0
2014	346.9	53.4%	1,218.0
2013	354.8	54.6%	1,298.0
2012	344.9	53.1%	717.4
<b>Rated Capacity</b>	<b>650</b>		

## 4.0 SUMMARY OF RAW SEWAGE AND EFFLUENT MONITORING

The Certificate of Approval (C of A) requires that the raw sewage be tested for CBOD<sub>5</sub>, Total Suspended Solids (TSS) and Total Phosphorous (TP) on a quarterly (once every three (3) months) basis. In 2025 raw sewage grab samples were collected in February, May, August, and November and tested for the above referenced parameters. **Table 2** shows a summary of the raw sewage monitoring data.

The C of A also requires the testing of lagoon contents for CBOD<sub>5</sub>, Total Suspended Solids and Total Phosphorus once, within one (1) week prior to each seasonal discharge. Spring discharge occurred from April 2<sup>nd</sup> to May 12<sup>th</sup>, 2025, whereas fall discharge occurred from November 3<sup>rd</sup> to November 20<sup>th</sup>, 2025. Before and during each discharge period the lagoon's contents were sampled and tested for CBOD<sub>5</sub>, Total Suspended Solids, and Total Phosphorous. **Table 3** provides a summary of the average monthly monitoring data for Cell #1 and Cell #2 contents during and prior to discharge. The effluent limits were met during the spring and fall discharge periods except for TSS during fall discharge

The volume discharged from the lagoons was 97,687 m<sup>3</sup> in the spring of 2025 and 42,005 m<sup>3</sup> in the fall. In 2025, a total of 139,692 m<sup>3</sup> of treated effluent was discharged as compared to 141,222 m<sup>3</sup> of raw sewage received at the plant. Elevated TSS in fall discharge was likely due to resuspended solids when drawing liquid from near lagoon bottom.

### 4.1 De-Sludging of Lagoons

The lagoon was desludged in 2019 by Geo-Dredging & Dewatering INC, removing and processing approximately 18,485 m<sup>3</sup> of material. No sludge was removed in 2025.

**TABLE 2**

Summary of Average Raw Sewage Monitoring Data - 2025  
Tara Wastewater Treatment Plant  
Municipality of Arran-Elderslie

March, 2026

13-028

5

Month	CBOD (mg/L)	Total Suspended Solids (mg/L)	Total Phosphorus (mg/L)	pH	Field Temp (Celsius)
Feb	207	241	3.45	7.40	10.50
May	265	455	8.00	7.29	12.00
Aug	55	102	1.70	7.03	16.70
Nov	192	252	6.88	7.65	5.00
<b>Average</b>	<b>180</b>	<b>263</b>	<b>5.01</b>	<b>7.34</b>	<b>11.1</b>

**TABLE 3**

Summary of Effluent Discharge Monitoring - Spring and Fall 2025

Tara Wastewater Treatment Plant

Municipality of Arran-Elderslie

March, 2026

13-028

	Date	Cell #1					Cell #2					E. Coli
		CBOD (mg/L)	TSS (mg/L)	Total Phosphorus (mg/L)	pH	Field Temp. (C°)	CBOD (mg/L)	TSS (mg/L)	Total Phosphorus (mg/L)	pH	Field Temp. (C°)	
	C of A Objectives	25	30	0.8			25	30	0.8			
	C of A Limits	30	40	1	6.5 - 9.0		30	40	1	6.5 - 9.0		
Spring Pre-Discharge	March 21	26	34	0.39	7.37	7.0	14	15	0.52	7.20	5.5	
	March 24	30	23	0.40	7.22	4.2	19	27	0.30	7.36	3.5	
	March 31	17	17	0.27	7.34	5.5	13	19	0.22	7.19	5.3	
Spring Discharge	April 3	14	15	0.18	7.34	3.3	12	17	0.22	7.26	3.7	49
	April 7	14	31	0.08	7.23	6.3	9	15	0.19	7.40	6.0	41
	April 11	9	11	0.07	7.41	2.2	14	21	0.12	7.35	2.9	130
	April 14	7	6	0.09	7.14	9.8	15	29	0.17	7.37	9.8	63
	April 17	8	7	0.09	7.39	5.6	16	23	0.13	7.21	6.1	1120
	April 22	10	16	0.14	7.17	8.7	14	30	0.16	7.41	8.9	488
	April 25	12	14	0.12	7.36	12.2	12	27	0.12	7.12	12.3	5
	April 28	14	12	0.14	7.21	14.3	9	12	0.14	7.40	13.1	59
	May 2	9	15	0.16	7.32	12.0	10	9	0.21	7.22	8.8	16
	May 5	15	13	0.21	7.13	16.4	15	18	0.12	7.32	14.8	1
	May 9	41	55	0.12	6.97	10.1	46	30	0.10	7.56	9.6	19
May 12	66	45	0.17	7.04	21.3	22	11	0.05	7.45	19.0	0	
	Seasonal Average (Spring) Discharge	18	20	0.13			16	20	0.14			
Fall Pre-Discharge	October 14	49	77	0.56	7.24	13.7	6	7	0.16	7.28	14.2	
	October 20	26	32	0.59	7.25	12.9	<4	2	0.21	7.30	13.5	
	October 27	31	47	0.29	7.25	6.9	<4	9	0.17	7.39	7.5	
Fall Discharge	November 3	22	50	0.28	7.43	8.4	7	8	0.11	7.60	7.8	68
	November 7	19	22	0.29	7.47	5.7	8	10	0.10	7.82	5.3	548
	November 10	26	43	0.33	7.45	1.3	12	19	0.10	7.69	1.2	2420
	November 14	16	43	0.44	7.70	3.6	10	29	0.17	7.50	3.2	2420
	November 17	23	55	0.45	7.86	1.4	18	132	0.32	7.12	4.4	2420
	November 21	14	89	0.38	7.64	2.7	10	29	0.21	7.59	1.4	185
	Seasonal Average (Fall) Discharge	20	50	0.36	-	-	11	38	0.17	-	-	-
	Compliance with Effluent Limits						Y	Y	Y			

**Note: The seasonal average effluent discharge concentration of a constituent must not exceed its corresponding C of A Limit which is based on average concentrations.**

## 5.0 SUMMARY OF MAINTENANCE PROGRAM

### January 28:

- Annual generator maintenance completed.

### February 27:

- Increased alum dosage by turning up pumps dial ½ turn each.

### April 2, 28:

- Began spring discharge from Cell #2.
- Calibration of flow meter (see Appendix B for report).

### May 1, 12, 22:

- Increased alum dosage by turning up pumps dial by ½ turn each.
- End of spring discharge from Cell #2.
- Removed and replaced 8" check valves with new 4" check valves.

### July 14, 24:

- Bulk load of alum (6,800 L approximately) was received at the plant.
- Decreased alum dosage by turning down pumps dial 1 and ½ turns each.
- Increased alum dosage by turning up pumps dial 1 turns each.

### September 22:

- Fosters flushed sewer collection system from Mill St., Hamilton St., and Brook St. E.

### October 15, 21, 23:

- Municipality flushed sewer collection system.
- Increased alum dosage by turning up pumps dial ½ turn each.

### November 3, 12, 20:

- Begin fall discharge from Cell #2.
- Turned valve at lagoons between Cell #1 and Cell #2 and valves at pumphouse in driveway.
- End of fall discharge from Cell #2.

### December 10, 30:

- Inspected roof with no noted deficiencies.
- Removed and replaced ferncos on roof drain in alum room.
- Bulk load of alum (12,200 L approximately) was received at the plant.
- Decreased alum dosage by turning down pumps dial 1 turn each.

## **6.0 SUMMARY OF COMPLAINTS RECEIVED**

No complaints were received in 2025 concerning the Tara Wastewater System.

## **7.0 ASSESSMENT OF SEPTAGE ACCEPTANCE**

In January 2005, Henderson Paddon & Associates Ltd., produced a report entitled “Assessment of Wastewater Treatment Plants in the Municipality of Arran-Elderslie to Treat Septage”. This study concluded and recommended the following:

1. The Tara lagoons could accept 1.5 loads of septage at 13.6 m<sup>3</sup> (3,000 IGAL) per load per week, from May 1 to October 31.
2. During the wintertime, this rate should be reduced to one (1) load every two (2) weeks.
3. Improvements to the lagoon to facilitate receiving this septage should be important.
4. It must be recognized that the receipt of septage at the lagoons will increase the sludge accumulation rate in the lagoons.

No septage was accepted at the Tara Wastewater Treatment Plant in 2025.

Operators should be vigilant and recognize that, should the plant’s capacity utilization increase significantly higher than 2005 capacity utilization, they will need to seek engineer’s assistance to re-evaluate the above assessment of treating septage at the plant.

## **8.0 SEWAGE BY-PASS**

There was no sewage by-pass in 2025.

## **9.0 MINISTRY OF THE ENVIRONMENT INSPECTION**

No MECP inspection of the plant occurred in 2025.


## 10.0 RECOMMENDATIONS

1. Sampling of raw sewage, lagoon contents and effluent during discharge to the stream should continue as required by the Certificate of Approval. Operator(s) should be careful while discharging the last portion of liquid from the lagoon. High velocity discharge should be avoided to prevent picking up of sludge solids from lagoon bottom.
2. A standard recording form for responding to complaints should be used for recording any complaints relating to the Tara Wastewater System.
3. The magnetic flow meter should be recalibrated again in April 2026.
4. Operators should seek engineering assessment for septage treatment, as earlier provided by Henderson Paddon in 2005, should the capacity utilization significantly increase from 2005 levels.

Respectfully submitted:

GSS Engineering Consultants Ltd.

Municipality of Arran-Elderslie

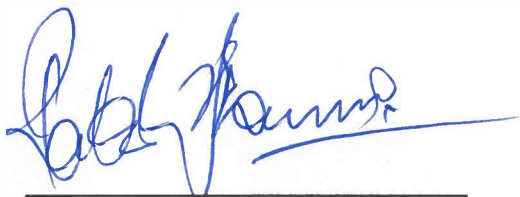

Rakesh Sharma, P. Eng., M.A.Sc.  
Class IV License, WWC and WWT  
Overall Responsible Operator



Chris Legge, Water & Sewer Foreman  
Class II WWT & Class II WWC, Backup ORO

GSS Engineering Consultants Ltd.

Municipality of Arran-Elderslie



Jacob Bartley, P.Eng.,  
Project Engineer



Scott McLeod, Public Works Manager  
Class II WWC & Class II WWT, Backup ORO

## **Appendix A**

### **Certificate of Approval**



Ontario

Ministry of the Environment  
Ministère de l'Environnement

AMENDED CERTIFICATE OF APPROVAL  
MUNICIPAL AND PRIVATE SEWAGE WORKS  
NUMBER 9456-659N92

RECEIVED

JAN 24 2005

ARRAN - ELDERSLIE

The Corporation of the Municipality of Arran-Elderslie  
P.O. Box 70, 1925 County Road 10  
Chesley, Ontario  
N0G 1L0

Site Location: Tara Sewage Lagoon  
Lot Pt Lt 28, Concession 7  
Arran-Elderslie Municipality, County of Bruce

*You have applied in accordance with Section 53 of the Ontario Water Resources Act for approval of:*

the municipal sewage treatment works at the above site location for the collection, transmission, treatment and disposal of domestic sewage with a *Rated Capacity* of 650 m<sup>3</sup>/d, consisting of the following:

**Inlet Forcemain**

- approx. 307 m of 200 mm dia. inlet forcemain on site from the property limits to the influent works of the waste stabilization pond;

**Waste Stabilization Pond**

- a 7.9 ha waste stabilization pond (approx. area at 1.5 m depth) constructed in two equal cells, complete with influent works, interconnecting structures and effluent works, and with phosphorus removal accomplished by injection of phosphorus removal chemical during pump operation at the sewage pumping station located in the Village of Tara;

**Outfall Sewer**

- approx. 183 m of 400 mm dia. outfall sewer on site and easements from the effluent works of the waste stabilization pond to the Sauble River;

**Miscellaneous**

- all other controls, electrical equipment, instrumentation, piping, pumps, valves and appurtenances essential for the proper operation of the aforementioned sewage works;

all in accordance with the following submitted supporting documents:

1. Final plans and specifications prepared by Henderson Paddon and Associates Limited.

*For the purpose of this Certificate of Approval and the terms and conditions specified below, the following definitions apply:*

"Act" means the Ontario Water Resources Act, R.S.O. 1990, Chapter 0.40, as amended;

"Average Daily Flow" means the cumulative total sewage flow to the sewage works during a calendar year divided by the number of days during which sewage was flowing to the sewage works that year;

"By-pass" means any discharge from the *Works* that does not undergo any treatment before it is discharged to the environment;

"CBOD5" means five day carbonaceous (nitrification inhibited) biochemical oxygen demand measured in an unfiltered sample;

"Certificate" means this entire certificate of approval document, issued in accordance with Section 53 of the *Act*, and includes any schedules;

"Daily Concentration" means the concentration of a contaminant in the effluent discharged over any single day, as measured by a composite or grab sample, whichever is required;

"Director" means any *Ministry* employee appointed by the Minister pursuant to section 5 of the *Act*;

"Discharge Season" means the Spring discharge period commencing after the liquid surface in the lagoon has become free of ice cover, terminating not later than May 14 or the Fall discharge period commencing not earlier than November 1 and terminating not later than December 15 in which discharge of effluent from the *Works* is permitted;

"District Manager" means the District Manager of the Barrie District Office of the Ministry;

"Ministry" means the Ontario Ministry of the Environment;

"Owner" means the Corporation of the Municipality of Arran-Elderslie and includes its successors and assignees;

"Rated Capacity" means the *Average Daily Flow* for which the *Works* are approved to handle;

"Regional Director" means the Regional Director of the Southwestern Region of the Ministry; and

"Seasonal Average Concentration" means the arithmetic mean of all *Daily Concentrations* of a contaminant in the effluent sampled or measured, or both, during a *Discharge Season*;

"Works" means the sewage works described in the *Owner's* application, this *Certificate* and in the supporting documentation referred to herein, to the extent approved by this *Certificate*.

*You are hereby notified that this approval is issued to you subject to the terms and conditions outlined below:*

## TERMS AND CONDITIONS

1. GENERAL PROVISIONS

- (1) The *Owner* shall ensure that any person authorized to carry out work on or operate any aspect of the *Works* is notified of this *Certificate* and the conditions herein and shall take all reasonable measures to ensure any such person complies with the same.
- (2) Except as otherwise provided by these Conditions, the *Owner* shall design, build, install, operate and maintain the *Works* in accordance with the description given in this *Certificate*, the application for approval of the works and the submitted supporting documents and plans and specifications as listed in this *Certificate*.
- (3) Where there is a conflict between a provision of any submitted document referred to in this *Certificate* and the Conditions of this *Certificate*, the Conditions in this *Certificate* shall take precedence, and where there is a conflict between the listed submitted documents, the document bearing the most recent date shall prevail.
- (4) Where there is a conflict between the listed submitted documents, and the application, the application shall take precedence unless it is clear that the purpose of the document was to amend the application.
- (5) The requirements of this *Certificate* are severable. If any requirement of this *Certificate*, or the application of any requirement of this *Certificate* to any circumstance, is held invalid or unenforceable, the application of such requirement to other circumstances and the remainder of this certificate shall not be affected thereby.

2. CHANGE OF OWNER

- (1) The *Owner* shall notify the *District Manager* and the *Director*, in writing, of any of the following changes within 30 days of the change occurring:
  - (a) change of *Owner*;
  - (b) change of address of the *Owner*;
  - (c) change of partners where the *Owner* is or at any time becomes a partnership, and a copy of the most recent declaration filed under the Business Names Act, R.S.O. 1990, c.B17 shall be included in the notification to the *District Manager*;
  - (d) change of name of the corporation where the *Owner* is or at any time becomes a corporation, and a copy of the most current information filed under the Corporations Informations Act, R.S.O. 1990, c. C39 shall be included in the notification to the *District Manager*;
- (2) In the event of any change in ownership of the *Works*, other than a change to a successor municipality, the *Owner* shall notify in writing the succeeding owner of the existence of this *Certificate*, and a copy of such notice shall be forwarded to the *District Manager* and the *Director*.

3. RECORD DRAWINGS

(1) A set of as-built drawings showing the works "as constructed" shall be kept up to date through revisions undertaken from time to time and a copy shall be retained at the *Works* for the operational life of the *Works*.

4. BY-PASSES

(1) Any *By-pass* of sewage from any portion of the *Works* is prohibited, except where:

(a) it is necessary to avoid loss of life, personal injury, danger to public health or severe property damage;

(b) the *District Manager* agrees that it is necessary for the purpose of carrying out essential maintenance and the *District Manager* has given prior written acknowledgment of the *by-pass*; or

(c) the *Regional Director* has given prior written acknowledgment of the *By-pass*.

(2) The *Owner* shall collect at least one (1) grab sample of the *By-pass* and have it analyzed for the parameters outlined in Condition 6 using the protocols in Condition 9.

(3) The *Owner* shall maintain a logbook of all *By-pass* events which shall include, at a minimum, the time, location, duration, quantity of *By-pass*, the authority for *By-pass* pursuant to subsection (1), and the reasons for the occurrence.

5. EFFLUENT OBJECTIVES

(1) The *Owner* shall use best efforts to design, construct and operate the *Works* with the objective that the concentrations of the materials named below as effluent parameters are not exceeded in the effluent from the *Works*.

<b>Effluent Parameter</b>	<b>Average Concentration</b> (milligrams per litre unless otherwise indicated)
Column 1	Column 2
<i>CBOD5</i>	25.0
Total Suspended Solids	30.0
Total Phosphorus	0.8

(2) The *Owner* shall use best efforts to:

(a) maintain the pH of the effluent from the *Works* within the range of 6.5 to 9.0, inclusive, at all times;

(b) operate the works within the *Rated Capacity* of the *Works*;

(c) ensure that the effluent from the *Works* is essentially free of floating and settleable solids and does not contain oil or any other substance in amounts sufficient to create a visible film or sheen or foam or discolouration on the receiving waters.

(3) The *Owner* shall include in all reports submitted in accordance with Conditions 9 and 10 a summary of the efforts made and results achieved under this Condition.

6. EFFLUENT LIMITS

(1) The *Owner* shall operate and maintain the *Works* such that the concentrations of the materials named below as effluent parameters are not exceeded in the effluent from the *Works*.

<b>Effluent Parameter</b>	<b>Average Concentration</b> (milligrams per litre unless otherwise indicated)
Column 1	Column 2
<i>CBOD5</i>	30.0
Total Suspended Solids	40.0
Total Phosphorus	1.0

(2) For the purposes of determining compliance with and enforcing subsection (1):

(a) The *Seasonal Average Concentration* of a parameter named in Column 1 of subsection (1) shall not exceed the corresponding maximum concentration set out in Column 2 of subsection (1).

(3) Paragraph (a) of subsection (2) shall apply upon the issuance of this certificate.

7. OPERATION AND MAINTENANCE

(1) The *Owner* shall exercise due diligence in ensuring that, at all times, the *Works* and the related equipment and appurtenances used to achieve compliance with this *Certificate* are properly operated and maintained. Proper operation and maintenance shall include effective performance, adequate funding, adequate operator staffing and training, including training in all procedures and other requirements of this *Certificate* and the *Act* and regulations, adequate laboratory facilities, process controls and alarms and the use of process chemicals and other substances used in the *Works*.

(2) The *Owner* shall maintain an operations manual, that includes, but not necessarily limited to, the following information:

(a) operating procedures for routine operation of the *Works*;

(b) inspection programs, including frequency of inspection, for the *Works* and the methods or

tests employed to detect when maintenance is necessary;

(c) repair and maintenance programs, including the frequency of repair and maintenance for the *Works*;

(d) procedures for the inspection and calibration of monitoring equipment;

(e) a spill prevention control and countermeasures plan, consisting of contingency plans and procedures for dealing with equipment breakdowns, potential spills and any other abnormal situations, including notification of the *District Manager*; and

(f) procedures for receiving, responding and recording public complaints, including recording any followup actions taken.

(3) The *Owner* shall maintain the operations manual current and retain a copy at the location of the *Works* for the operational life of the *Works*. Upon request, the *Owner* shall make the manual available to *Ministry* staff.

(4) The *Owner* shall provide for the overall operation of the *Works* with an operator who holds a licence that is applicable to that type of facility and that is of the same class as or higher than the class of the facility in accordance with Ontario Regulation 129/04.

#### 8. SPECIAL OPERATIONS - SEASONAL DISCHARGE

(1) The *Owner* shall operate the *Works* such that discharge is conducted on a semi-annual discharge basis with the effluent being discharged in the spring and the fall as follows:

spring: discharge commencing after the liquid surface in the lagoon has become free of ice cover, terminating not later than May 14, and

fall: discharge commencing not earlier than November 1 and terminating not later than December 15.

#### 9. EFFLUENT MONITORING AND RECORDING

The *Owner* shall, upon commencement of operation of the *Works*, carry out the following monitoring program:

(1) All samples and measurements taken for the purposes of this *Certificate* are to be taken at a time and in a location characteristic of the quality and quantity of the effluent stream over the time period being monitored.

(2) For the purposes of this condition, the following definitions apply:

(a) Quarterly means once every three months;

(3) Samples shall be collected at the following sampling points, at the frequency specified, by means of the specified sample type and analyzed for each parameter listed and all results recorded:

<b>Table 3 - Raw Sewage Monitoring</b>	
<b>Frequency</b>	Quarterly
<b>Sample Type</b>	Grab
<b>Parameters</b>	CBOD5, Total Suspended Solids, Total Phosphorus

<b>Table 4 - Lagoon Contents (within one week prior to each seasonal discharge)</b>		
<b>Parameters</b>	<b>Sample Type</b>	<b>Frequency</b>
CBOD5	Grab	once
Total Suspended Solids	Grab	once
Total Phosphorus	Grab	once

<b>Table 5 - Effluent Monitoring (beginning, during and at the end of each discharge season)</b>		
<b>Parameters</b>	<b>Sample Type</b>	<b>Frequency</b>
CBOD5	Grab	2 times a week
Total Suspended Solids	Grab	2 times a week
Total Phosphorus	Grab	2 times a week

(4) The methods and protocols for sampling, analysis and recording shall conform, in order of precedence, to the methods and protocols specified in the following:

- \* (a) the Ministry's Procedure F-10-1, "Procedures for Sampling and Analysis Requirements for Municipal and Private Sewage Treatment Works (Liquid Waste Streams Only), as amended from time to time by more recently published editions;
- \* (b) the Ministry's publication "Protocol for the Sampling and Analysis of Industrial/Municipal Wastewater" (January 1999), ISBN 0-7778-1880-9, as amended from time to time by more recently published editions;
- \* (c) the publication "Standard Methods for the Examination of Water and Wastewater" (20th edition), as amended from time to time by more recently published editions;

(5) The measurement frequencies specified in subsection (2) in respect to any parameter are minimum requirements which may, after 6 months of monitoring in accordance with this Condition, be modified by the *District Manager* in writing from time to time.

(6) The *Owner* shall install and maintain (a) continuous flow measuring device(s), to measure the flowrate of the influent to the *Works* with an accuracy to within plus or minus 15 per cent (+/- 15%) of the actual flowrate for the entire design range of the flow measuring device, and record the flowrate at a

daily frequency.

(7) The *Owner* shall measure and record the flowrate and quantity of effluent from the *Works* during each *Discharge Season*.

10. REPORTING

(1) Ten (10) days prior to the date of a planned *By-pass* being conducted pursuant to Condition 4 and as soon as possible for an unplanned *By-pass*, the *Owner* shall notify the *District Manager* (in writing) of the pending start date, in addition to an assessment of the potential adverse effects on the environment and the duration of the *By-pass*.

(2) The *Owner* shall report to the *District Manager* or designate, any exceedence of any parameter specified in Condition 6 orally, as soon as reasonably possible, and in writing within seven (7) days of the exceedence.

(3) In addition to the obligations under Part X of the Environmental Protection Act, the *Owner* shall, within 10 working days of the occurrence of any reportable spill as defined in Ontario Regulation 675/98, bypass or loss of any product, by-product, intermediate product, oil, solvent, waste material or any other polluting substance into the environment, submit a full written report of the occurrence to the *District Manager* describing the cause and discovery of the spill or loss, clean-up and recovery measures taken, preventative measures to be taken and schedule of implementation.

(4) The *Owner* shall, upon request, make all manuals, plans, records, data, procedures and supporting documentation available to *Ministry* staff.

(5) The *Owner* shall prepare, and submit to the *District Manager*, a performance report, on an annual basis, within ninety (90) days following the end of the period being reported upon. The first such report shall cover the first annual period following the commencement of operation of the *Works* and subsequent reports shall be submitted to cover successive annual periods following thereafter. The reports shall contain, but shall not be limited to, the following information:

(a) a summary and interpretation of all monitoring data and a comparison to the effluent limits outlined in Condition 6, including an overview of the success and adequacy of the *Works*;

(b) a description of any operating problems encountered and corrective actions taken;

(c) a summary of all maintenance carried out on any major structure, equipment, apparatus, mechanism or thing forming part of the *Works*;

(d) a summary of any effluent quality assurance or control measures undertaken in the reporting period;

(e) a summary of the calibration and maintenance carried out on all effluent monitoring equipment; and

(f) a description of efforts made and results achieved in meeting the Effluent Objectives of Condition 5.

(g) a summary of any complaints received during the reporting period and any steps taken to address the complaints;

(h) a summary of all *By-pass*, spill or abnormal discharge events; and

(i) any other information the *District Manager* requires from time to time.

*The reasons for the imposition of these terms and conditions are as follows:*

1. Condition 1 is imposed to ensure that the *Works* are built and operated in the manner in which they were described for review and upon which approval was granted. This condition is also included to emphasize the precedence of Conditions in the *Certificate* and the practice that the Approval is based on the most current document, if several conflicting documents are submitted for review. The condition also advises the Owners their responsibility to notify any person they authorized to carry out work pursuant to this *Certificate* the existence of this *Certificate*.
2. Condition 2 is included to ensure that the *Ministry* records are kept accurate and current with respect to the approved works and to ensure that subsequent owners of the *Works* are made aware of the *Certificate* and continue to operate the *Works* in compliance with it.
3. Condition 3 is included to ensure that record drawings of the *Works* "as constructed" are maintained for future references.
4. Condition 4 is included to indicate that by-passes of untreated sewage to the receiving watercourse is prohibited, save in certain limited circumstances where the failure to *By-pass* could result in greater injury to the public interest than the *By-pass* itself where a *By-pass* will not violate the approved effluent requirements, or where the *By-pass* can be limited or otherwise mitigated by handling it in accordance with an approved contingency plan. The notification and documentation requirements allow the *Ministry* to take action in an informed manner and will ensure the *Owner* is aware of the extent and frequency of *By-pass* events.
5. Condition 5 is imposed to establish non-enforceable effluent quality objectives which the *Owner* is obligated to use best efforts to strive towards on an ongoing basis. These objectives are to be used as a mechanism to trigger corrective action proactively and voluntarily before environmental impairment occurs and before the compliance limits of Condition 6 are exceeded.
6. Condition 6 is imposed to ensure that the effluent discharged from the *Works* to the Sauble River meets the *Ministry's* effluent quality requirements thus minimizing environmental impact on the receiver and to protect water quality, fish and other aquatic life in the receiving water body.
7. Condition 7 is included to require that the *Works* be properly operated, maintained, funded, staffed and equipped such that the environment is protected and deterioration, loss, injury or damage to any person

or property is prevented. As well, the inclusion of a comprehensive operations manual governing all significant areas of operation, maintenance and repair is prepared, implemented and kept up-to-date by the owner and made available to the *Ministry*. Such a manual is an integral part of the operation of the *Works*. Its compilation and use should assist the *Owner* in staff training, in proper plant operation and in identifying and planning for contingencies during possible abnormal conditions. The manual will also act as a benchmark for *Ministry* staff when reviewing the *Owner's* operation of the work.

8. Condition 8 is included to ensure that the treated effluent is discharged to the receiver during periods and at rates that minimizes the environmental impact on the receiver.
9. Condition 9 is included to enable the *Owner* to evaluate and demonstrate the performance of the *Works*, on a continual basis, so that the *Works* are properly operated and maintained at a level which is consistent with the design objectives and effluent limits specified in the *Certificate* and that the *Works* does not cause any impairment to the receiving watercourse.
10. Condition 10 is included to provide a performance record for future references, to ensure that the *Ministry* is made aware of problems as they arise, and to provide a compliance record for all the terms and conditions outlined in this *Certificate*, so that the *Ministry* can work with the *Owner* in resolving any problems in a timely manner.

**This Certificate of Approval revokes and replaces Certificate(s) of Approval No. 1-704-80-006 issued on July 2, 1980.**

*In accordance with Section 100 of the Ontario Water Resources Act, R.S.O. 1990, Chapter 0.40, as amended, you may by written notice served upon me and the Environmental Review Tribunal within 15 days after receipt of this Notice, require a hearing by the Tribunal. Section 101 of the Ontario Water Resources Act, R.S.O. 1990, Chapter 0.40, provides that the Notice requiring the hearing shall state:*

1. The portions of the approval or each term or condition in the approval in respect of which the hearing is required, and;
2. The grounds on which you intend to rely at the hearing in relation to each portion appealed.

*The Notice should also include:*

3. The name of the appellant;
4. The address of the appellant;
5. The Certificate of Approval number;
6. The date of the Certificate of Approval;
7. The name of the Director;
8. The municipality within which the works are located;

*And the Notice should be signed and dated by the appellant.*

*This Notice must be served upon:*

The Secretary\*  
Environmental Review Tribunal  
2300 Yonge St., 12th Floor  
P.O. Box 2382

AND

The Director  
Section 53, *Ontario Water Resources Act*  
Ministry of the Environment  
2 St. Clair Avenue West, Floor 12A

Toronto, Ontario  
M4P 1E4


Toronto, Ontario  
M4V 1L5

\* Further information on the Environmental Review Tribunal's requirements for an appeal can be obtained directly from the

Tribunal at: Tel: (416) 314-4600, Fax: (416) 314-4506 or [www.ert.gov.on.ca](http://www.ert.gov.on.ca)

*The above noted sewage works are approved under Section 53 of the Ontario Water Resources Act.*

DATED AT TORONTO this 11th day of January, 2005



---

Mohamed Dhalla, P.Eng.  
Director  
Section 53, *Ontario Water Resources Act*

FL/

c: District Manager, MOE Owen Sound  
Matt G. Prentice, Henderson Paddon & Associates Ltd.  
Drinking Water, Wastewater and Watershed Section, MOE Standards Development Branch

## **Appendix B**

### **Flow Meter Calibration Report**

## Tower Electronics Canada Inc. Calibration Certificate

**Customer:**

Municipality of Arran-Elderslie  
 Chris Legge  
 Water Foreman  
[Water@arran-elderslie.ca](mailto:Water@arran-elderslie.ca)

**Calibration by:**

Dan Matchett

**Standards:**

Fluke 289 S/N 96220182 NIST Cal Due March 2026

**Instrument Type**

Magnetic Flow Meter

**Meter Information**

Date of Test: 2025-04-28  
 Location: Tara Sewage PS  
 Meter Under Test: Station Flow  
 Client Tag: n/a  
 Manufacturer: ABB  
 Model: Watermaster  
 Serial Number: 3K620000155000  
 Totalizer As Found: 1454750.4M3  
 Totalizer As Left: 1454766.5M3  
 Acceptable Tolerance: 15%

**Programming Parameters:**

DN Size: DN250  
 Cal Factor: QMAX175  
 Zero Cal: 0

Calibration Due: Apr-26

**Method of verification**

Verimaster/Watermaster Internal Check/ABB Ability Verification

**Wet Well Dimensions**

6.960m x 3.184m

**Meter Programming**

**Units:** LPS  
**Zero:** 0.00  
**Span:** 100.00  
**Totalizer:** M3

Volumetric Test		Unit
Meter Under Test Totalizer Start	1454750.400	m3
Meter Under Test Totalizer Stop	1454762.200	
Total Volume of Test	11.800	
Calculated Volume:	13.150	
Error %	-11.441	
Result:	PASS	

**OIML/R49 Internal Flow Meter Checks:**

**Current Output Simulated**

Parameter	Value	Result	Output Test(mA/Hz):		
			Sim mA	Measured	Error
E1 Resistance ohms	1342	PASS	4.000	3.996	0.100
E2 Resistance ohms	1076	PASS	8.000	7.983	0.213
Coil Resistance ohms	35.24	PASS	12.000	11.976	0.200
Coil Inductance mH	158.81	PASS	16.000	15.976	0.150
Sensor Shift%	0.1	PASS	20.000	19.988	0.060
TX Gain %	0.07	PASS			
ABB Diagnostics	0x000000000000	PASS			0.14
OIML Warnings	0	PASS			PASS

**Comments:**

Based on ABB Watermasters OIML/R49 standard the meter is operation within 1% of accuracy.  
 Meter passes secondary volumetric test.